



# HOW TO SINK AN ABOVE GROUND POOL INTO THE GROUND


- Make a hole approx 1 m deep and 0,60 m more larger than your above ground pool.
- The ground and sand must be as smooth as possible for the bottom of the pool to be even.

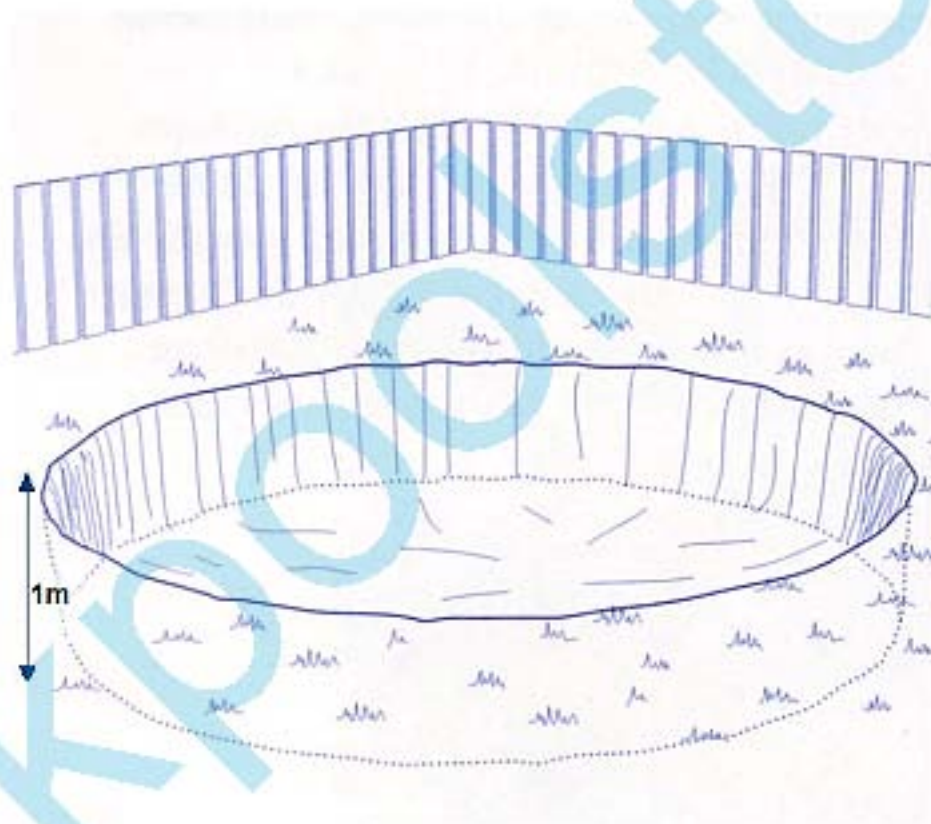

- Assemble your above ground pool (See "Assembly Instructions").

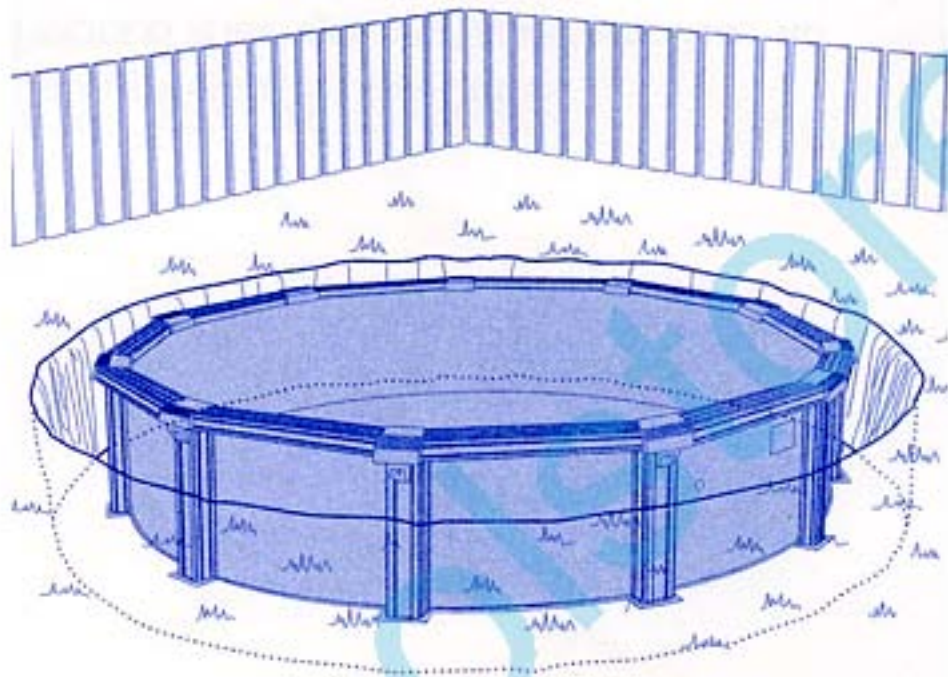

- After the installation, you must have a drain to evacuate water under the bottom of the pool.
- Make a protection for the wall with "polystyren" (5 cm thick).
- In the hole, put earth and dry concrete on top of the earth by layers and put water frequently to solidify the earth (4 doses of earth for 1 dose of dry concrete).

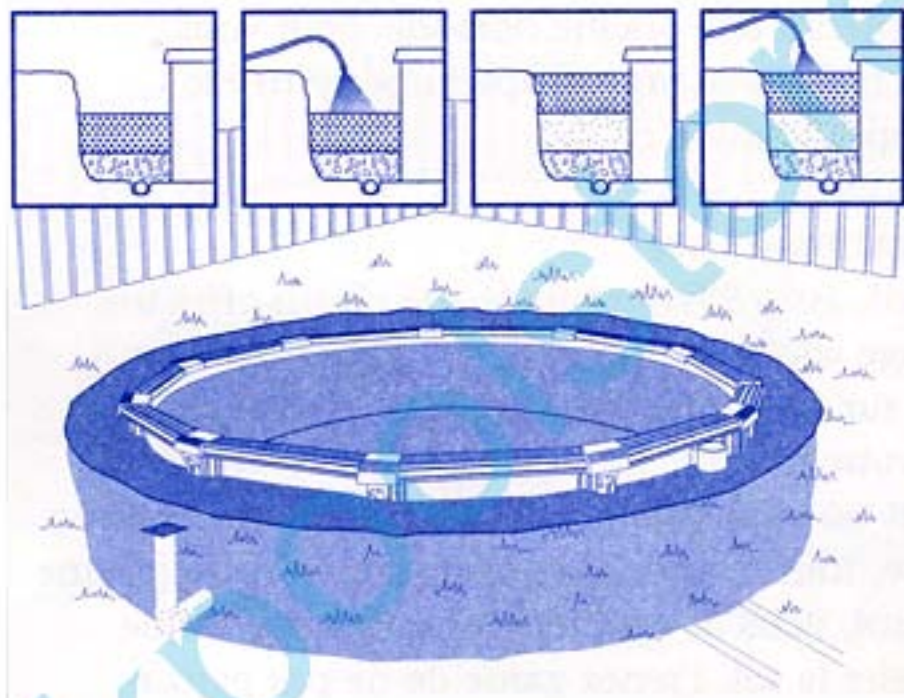

- When the earth and the concrete are dry and solid, you could finish the side walk around your swimming pool.

