

SUPERPOOL I PUMPS

2 year warranty

PUMP RANGE



Performing and made to last

- Self-priming pump with closed ventilated motor (IPX5)
- Components molded of corrosion-proof reinforced thermoplastics


Technical specifications

- 1"1/2 IN/OUT
- See-thru strainer cover with wing screws
- Drain plug for easy winterizing

Compatible

salt water chlorination

Performances

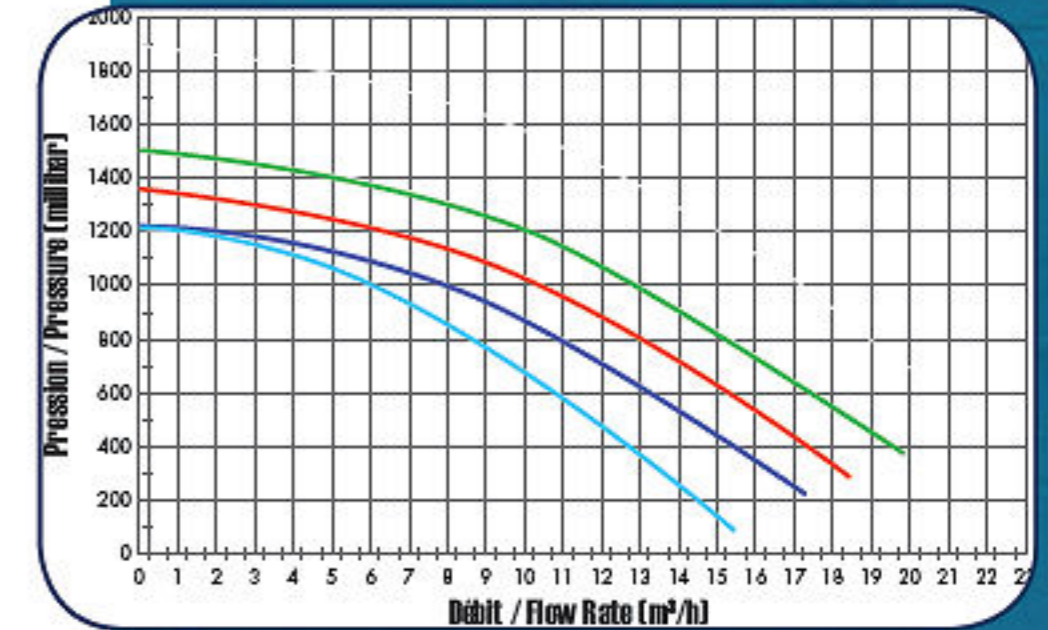

Reference	Power	Watt	Flow rate*	Dim. A.
POWPSCP05	1/2 CV	0,37 Kw	8 m³/h	213 mm
POWPSCP075	3/4 CV	0,55 Kw	11 m³/h	213 mm
POWPSCP1	1 CV	0,75 Kw	13 m³/h	213 mm
POWPSCP15	1,5 CV	1,10 Kw	15 m³/h	225 mm

