

## TRITON® NEO TM®

### FEATURES

- Seamless composite construction eliminates possibilities of leaks. Cannot rust or corrode
- Valve with an incorporated 360° diffuser to keep the sand bed flat
- Easy-to-use water drain for simplified service and winterizing
- Top-mounted six-position multi-port valve with sight glass, built-in pressure gauge, manual air relief valve, flange connections and clamp ring to make inspection and routine maintenance fast, safe and easy
- Filter laterals have a bayonet connection for easy servicing
- **Available with ClearPro Technology**



Model	Filter (mm) Ø	Recommended flow rate (m³/h)	Filter Area (m²)	Flange connection	Sand 0.4 - 0.8 mm (kg)	Gravel 3 - 5 mm (kg)	Clearance distance (mm)	Maximum working pressure (bar)	Valve
-------	---------------	------------------------------	------------------	-------------------	------------------------	----------------------	-------------------------	--------------------------------	-------

#### Triton Neo Top Mount


F-19T8-NEO	480	8,5	0,17	1 ½"	80	/	985	3,5	6-way
F-24T8-NEO	610	14	0,29	1 ½"	150	/	1115	3,5	6-way
F-30T8-NEO	762	22	0,45	2"	275	/	1286	3,5	6-way

Valve included, along with top-hat adaptor to allow easy media recharge

Model	Length (cm)	Width (cm)	Height (cm)	Gross Weight (kg)	Pcs by pallet	Length pallet (cm)	Width pallet (cm)	Height pallet (cm)
-------	-------------	------------	-------------	-------------------	---------------	--------------------	-------------------	--------------------

#### Triton Neo Top Mount

F-19T8-NEO	49	49	88	11,0	8	98	98	189
F-24T8-NEO	63	63	102	16,3	8	126	126	218
F-30T8-NEO	78	78	120	28,3	2	156	80	134

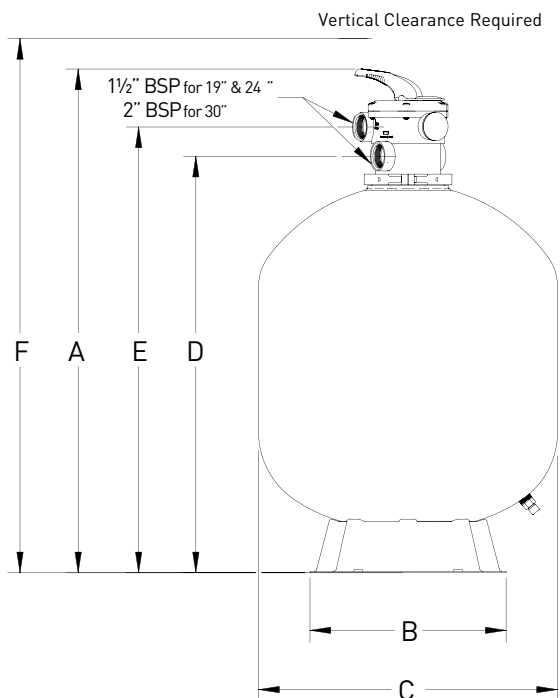

	F-19T8-NEO	F-24T8-NEO	F-30T8-NEO
A	878	1009	1170
B	400	400	610
C	480	610	762
D	715	847	1026
E	774	904	1108
F	1194	1448	1664