

# LACRON

## LSR Side Mount Sand Filters



Lacron's LSR side mount filter range is ideal for permanent in ground residential swimming pools. The main tank structure is manufactured from extremely hard wearing glass reinforced polyester (GRP).

LSR filters are tested to 4 Bar and are designed to operate at a maximum pressure of 2.5 Bar.


#### **Warranty**

Waterco shows its ultimate confidence in its range of Lacron LSR filters by offering a 5 (1+4) year tank warranty and 1 year warranty on all other components.

**WATERCO**  
EUROPE LTD

**LACRON**

[www.waterco.com](http://www.waterco.com)

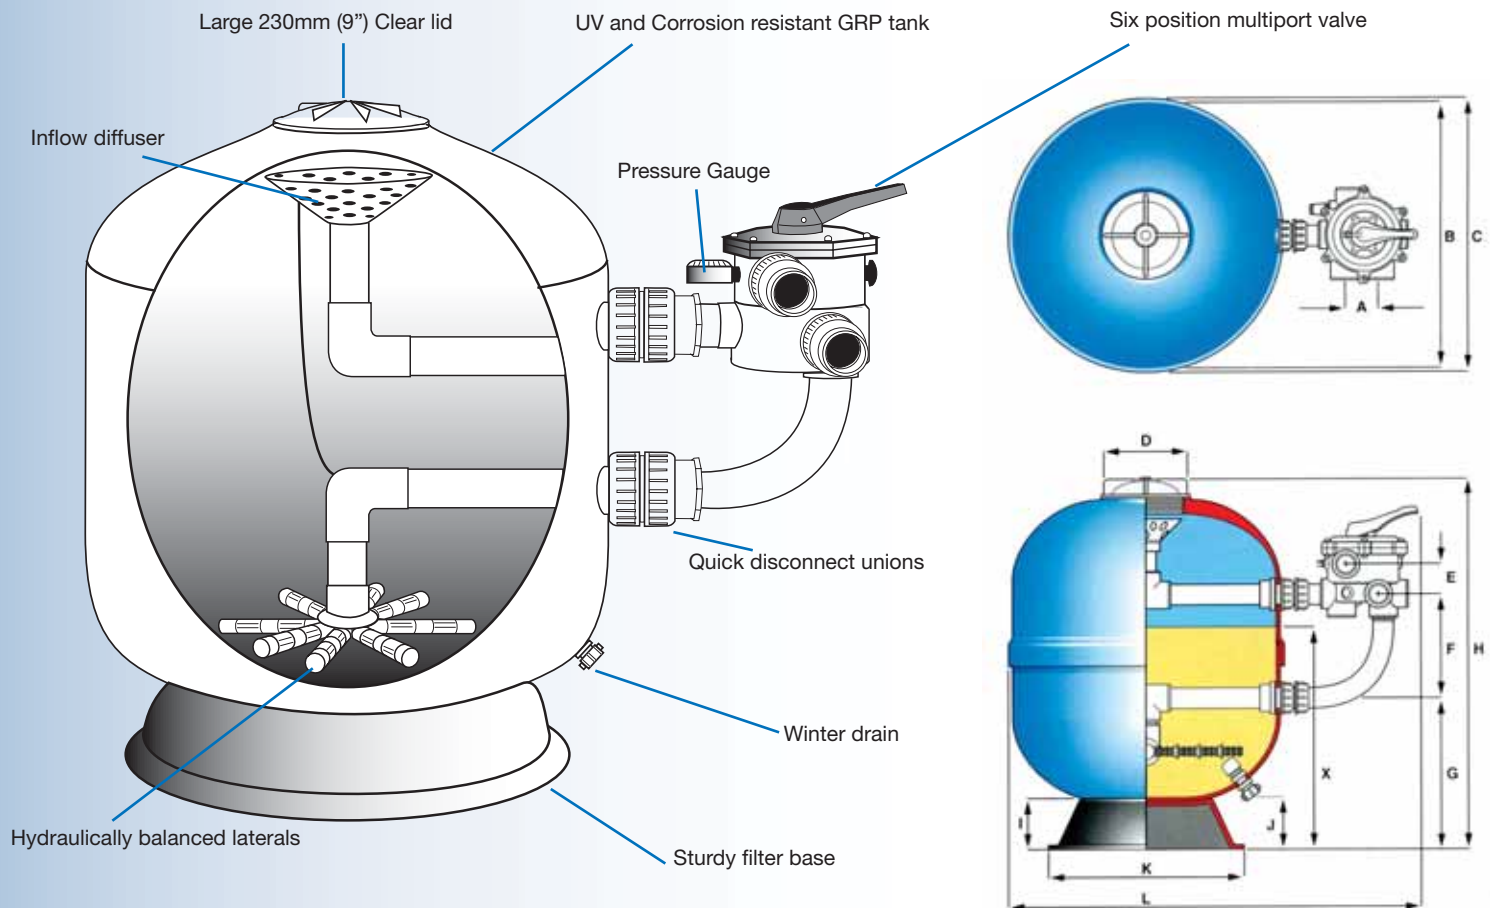

Model	A	B	C	D	E	F	G	H	I	J	K	L	X
LSR-16	73	450	465	230	61	127	240	575	65	70	360	725	300
LSR-18	73	460	475	230	61	204	245	685	65	70	360	790	350
LSR-20	73	500	525	230	61	204	250	700	65	70	360	900	365
LSR-24	73	610	625	230	61	204	250	760	65	70	490	945	380
LSR-30	70	762	780	230	81	215	315	780	85	90	560	1100	400

Filter Model	Tank Diameter	Bed Depth	Filter Area	Valve Size	Pea Gravel	Sand	Lacronite	Max. Flow	Max. Pool Size
	(mm)	(mm)	(m <sup>2</sup> )	( inch/mm )	(kg)	(kg)	(kg)	(m <sup>3</sup> /hr, Std)	(m <sup>3</sup> )
LSR-16	400	300	0.130	1½ / 50	NR	50	40	6.5	37.5
LSR-18	460	350	0.160	1½ / 50	NR	75	60	8.5	50
LSR-20	500	365	0.200	1½ / 50	NR	100	80	10	60
LSR-24	610	380	0.300	1½ / 50	NR	125	100	14.5	85
LSR-30	760	400	0.460	2 / 63	50	150	125	22.5	130

**WATERCO**

Water, the liquid of life

OFFICES - EUROPE

Radfield, London Road,  
Teynham  
Sittingbourne, Kent, ME9  
9PS, UK  
Tel: + 44 (0) 1795 521733  
Fax: +44 (0) 1795 522 085

